


Amaris

4 Colours | 3 Finish | 8 Sizes

Amaris combines the natural character of terrazzo with a soft, understated palette. Subtle tonal variation and delicate aggregate detailing bring depth and texture, while a choice of smooth and structured finishes offers versatility across commercial interiors.




Amaris

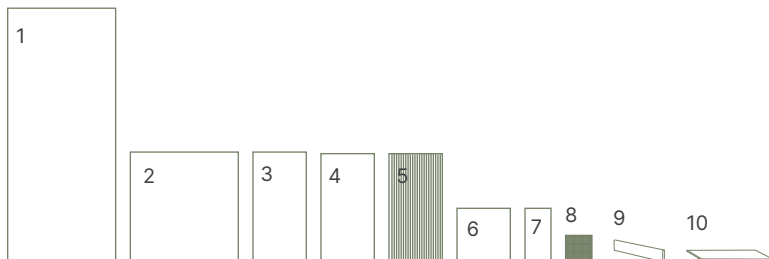

Sizes (mm)	> <			Availability
1 1200×2780	6mm	Natural ≥36PTV	Natural 25-35PTV	PEFA53524, 27, PEFA53524T1, 27T1
2 1200×1200	9mm	Natural ≥36PTV Lappato Ultra Matt ≥45PTV	Natural 25-35PTV Lappato Ultra Matt ≥36PTV	PEFA53524 - 27, PEFA53524T1, 27T1 PEFA53524T1, 27T1 PEFA53524, 27
3 600×1200	9mm	Natural ≥36PTV Lappato Ultra Matt ≥45PTV	Natural 25-35PTV Lappato Ultra Matt ≥36PTV	All colours PEFA53524T1, 27T1 All colours PEFA53524T1, 27T1
4 600×1200 THK	20mm	Thick ≥45PTV	Natural 25-35PTV	PEFA53525, 27
5 600×1200 T2	9mm	Natural ≥36PTV	Natural 25-35PTV	All colours
6 600×600	9mm	Natural ≥36PTV	Natural 25-35PTV	All colours
7 300×600	9mm	Natural ≥36PTV	Natural 25-35PTV	All colours
8 50×50 MOS on 300×300 mesh	9mm	Natural ≥36PTV	Natural 25-35PTV	All colours
9 SK 70×600	9mm	Natural ≥36PTV	Natural 25-35PTV	All colours
10 ST1 330×1200×32×32	9mm	Natural ≥36PTV	Natural 25-35PTV	All colours



0345 130 2241 | sales@grestec.co.uk | www.grestec.co.uk

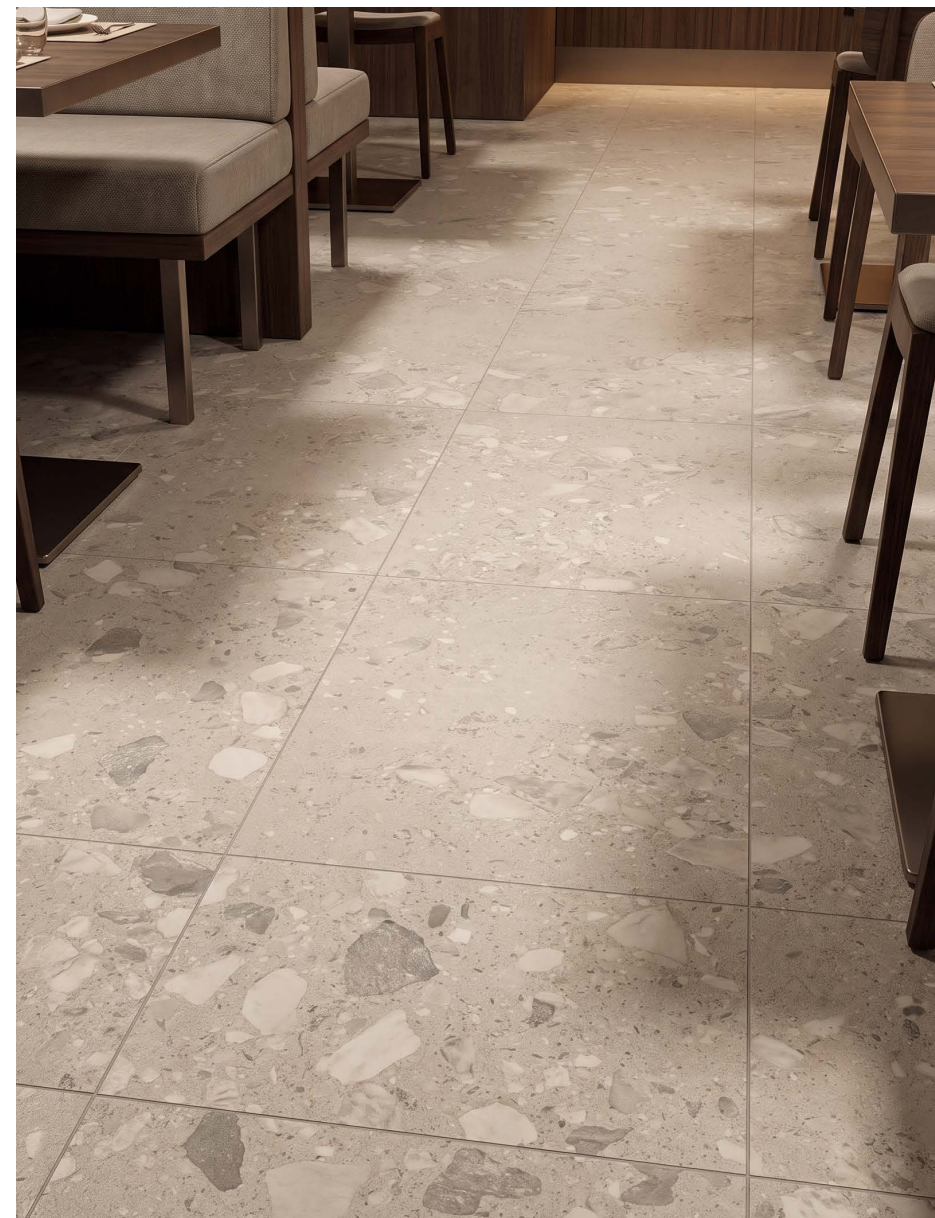

Amaris PEFA53525T1



Above: Amaris PEFA53525THK
Right: Amaris PEFA53524T1



Above: Amaris PEFA53527 PEFA53527T2

ISO 10545 Results

3	Water absorption	Conforms
4	Modulus of rupture	6.5mm - ≥ 35 N/mm ² 9mm - ≥ 45 N/mm ² 20mm - ≥ 45 N/mm ²
2	Breaking strength	6.5mm - ≥ 700 N 9mm - ≥ 2000 N 20mm - ≥ 2500 N
12	Frost resistance	Resistant
13	Chemical resistance	A - LA - HA
14	Stain resistance	Class 5
	Recycled content	6.5mm - 0% 9mm - 15% 20mm - 25%

Slip resistance

Pendulum test - Slider 96 (Shod) Wet	Natural ≥ 36 PTV Ultra Matt ≥ 45 PTV Thick ≥ 45 PTV
Pendulum test - Slider 55 (Barefoot) Wet	Natural 25-35PTV Ultra Matt ≥ 36 PTV Thick ≥ 45 PTV

Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRVs and PTVs

LRV and PTV values may vary between batches; please contact us for guidance.

Document + web colours

Swatch colours may differ from final production, samples are recommended.

Sustainability



Shade variation

