
Modacrete

7 Colours | **3** Finishes | **11** Sizes

Modacrete reimagines industrial concrete in high-performance porcelain across seven balanced colourways, pairing subtle tonal variation with three finishes—Natural, Anti-slip, and 20 mm Thick—for seamless indoor-outdoor continuity. Available in 11 versatile formats, including large slabs up to 1200×1200 mm, textured T3 tiles, and hexagons, it brings durable architectural simplicity to contemporary walls and floors.

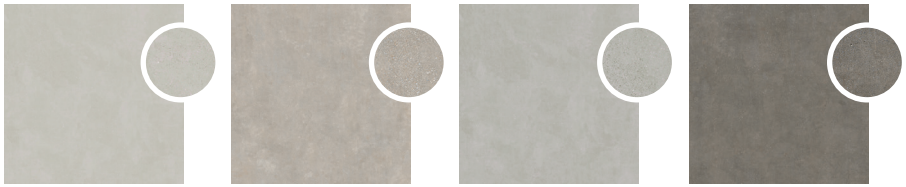

PDEB54530
LRV 51

PDEB54531
LRV 38

PDEB54532
LRV 41

PDEB54533
LRV 19

PDEB54534
LRV 30

PDEB54535
LRV 33

PDEB54536
LRV 17


Grestec

0345 130 2241 | sales@grestec.co.uk | www.grestec.co.uk



Modacrete PDEB54536

Modacrete

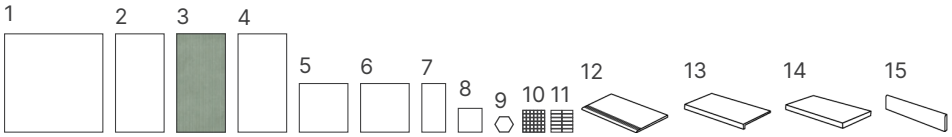

	Sizes (mm)	Thickness	SHOD PTV WET SLIDER 96	BAREFOOT PTV WET SLIDER 55	Availability
1	1200×1200	9	Natural ≥36 PTV	-	All colours
2	600×1200	9	Natural ≥36 PTV	Anti-slip ≥38 PTV	All colours
3	600×1200 T3	9	Natural	-	All colours
4	600×1200 THK	20	Thick	Thick	PDEB545 32, 33
5	600×600	9	Natural ≥36 PTV	Anti-slip ≥38 PTV	All colours
6	600×600 THK	20	Thick	Thick	All colours
7	300×600	9	Natural ≥36 PTV	Anti-slip ≥38 PTV	All colours
8	300×300	9	Natural ≥36 PTV	-	All colours
9	125×220 HEX	9	Natural ≥36 PTV	-	All colours
10	50×50 mosaic on 300×300	9	Natural ≥36 PTV	-	All colours
11	50×150 mosaic on 300×300	9	Natural ≥36 PTV	-	All colours
12	300×1200 / 300×600 ST1	9	Natural ≥36 PTV	-	All colours
13	330×1200×40 ST2	9	Natural ≥36 PTV	-	All colours
14	330×1200×40 Corner	9	Natural ≥36 PTV	-	All colours
15	70×600 SK	9	Natural ≥36 PTV	-	All colours

Surface Roughness
Natural: Rz 31
Anti-slip: Rz 42



Modacrete PDEB54530 PDEB54530THK

0345 130 2241 | sales@grestec.co.uk | www.grestec.co.uk

Modacrete



Above: Modacrete PDEB54535 PDEB54535HEX
Right: Modacrete PDEB54534





Above: Modacrete PDEB54531T3

Modacrete

ISO 10545 Results

2	**Sizes**	Very low tolerance
3	**Water absorption**	< 0,1%
4	**Flexural strength**	45 N/mm2
6	**Deep abrasion resistance**	≤ 150 mm3
8	**Linear thermal expansion**	6 × 10-6
12	**Frost resistance**	Conforms
13	**Chemical resistance**	A
14	**Stain resistance**	Class 4-5

Slip resistance

Pendulum test - Slider 96 (Shod) Wet	Natural ≥36PTV
Pendulum test - Slider 55 (Barefoot) Wet	Anti-slip ≥38PTV

Cleaning and maintenance advice

Initial washing
The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance
The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance
Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRVs and PTVs

LRV and PTV values may vary between batches; please contact us for guidance.

Document + web colours

Swatch colours may differ from final production, samples are recommended.

Sustainability

ISO 14001 · EPD VERIFIED ISO 14025 · 20% RECYCLED MATERIAL

Shade variation

V2