

Travino

- Expansive range of colours
- Suitable for wall applications
- Glazed tiles

38
COLOURS

1
FINISH


7
TILE SIZES

GRESTEC.CO.UK / 0345 130 2241



*ALSO AVAILABLE LOOSE

	SIZES (MM)	THICKNESS	FINISHES
1	200x400	8.5MM	GLAZED
2	50x400 ON 300x400 MESH*	8.5MM	GLAZED
3	200x200	7MM	GLAZED
4	100x200	7MM	GLAZED
5	50x200 ON 300x400 MESH*	7MM	GLAZED
6	100x100 ON 300x400 MESH*	7MM	GLAZED
7	50x50 ON 300x400 MESH*	7MM	GLAZED
8	25x200 (COD.M)	-	GLAZED
9	25x200 (COD.N)	-	GLAZED
10	12x200 (STICK)	-	GLAZED
11	25x200 (QUADRA)	-	GLAZED
12	25x100 (COD K)	-	GLAZED
13	100x200 (COD X)	-	GLAZED
14	25x25 (COD.E)	-	GLAZED
15	25x25 (COD.F)	-	GLAZED

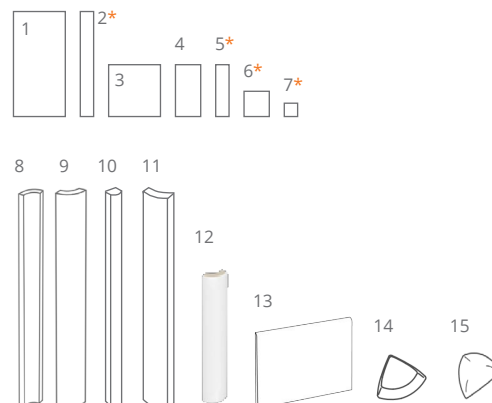

TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	STANDARD	AVERAGE VALUES	
Water absorption	ISO 10545-3	<2.5%	
Sizes	ISO 10545-2	Sides	0.3%
		Thickness	0.4%
		Straightness of sides	0.4%
		Squareness	0.4%
		Flatness	0.4%
		Surface Quality	min 95%
Bending strength	ISO 10545-4	>340N/mm ²	
Coefficient of linear thermal expansion	ISO 10545-8	<5x10-6/°C	
Thermal Shock Resistance	ISO 10545-9	Pass	
Expansion in humidity	ISO 10545-10	<0.04%	
Crazing Resistance	ISO 10545-11	Pass	
Frost resistance	ISO 10545-12	Pass	
Chemical Resistance	ISO 10545-13	GB min.	
Stain Resistance	ISO 10545-14	Class 3 min	

CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure. • Clean wall tiling with a dry cloth when joints are hard.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Remove dust with a dry cloth • Wash with FilaCleaner using a cloth that should be soaked often in the solution and wrung out well