

Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and Floors**

6

3

9


Colours
Finishes
Tile sizes

Fistral

Fistral seamlessly blends the allure of natural stone with the exceptional technical characteristics of porcelain stoneware, enhancing its versatility. The tiles showcase irregular veining, balanced nuvolato effects and subtle hues, accentuating both its colour and the tactile qualities reminiscent of natural stone.



Shade variation: V2 moderate

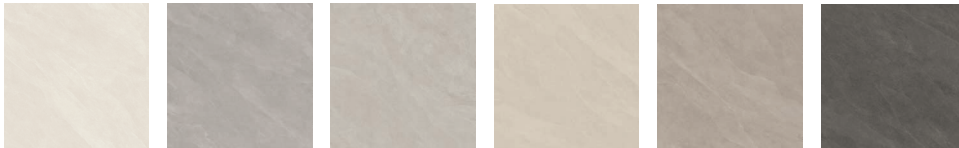

PDCB51067
LRV: 53

PDCB51068 *
PDCB51068THK
LRV: 36


PDCB51069*
PDCB51069THK
LRV: 42

PDCB51070*
PDCB51070THK
LRV: 46

PDCB51071
LRV: 33

PDCB51072
LRV: 14

	Sizes (mm)	> <	Finishes		
1	1200x1200	9mm	BRU R10	-	-
2	600x1200	9mm	BRU R10	NAT R11 ≥36 PTV	-
3	600x1200 THK*	20mm	-	-	THK R11 ≥36 PTV
4	600x600	9mm	BRU R10	NAT R11 ≥36 PTV	-
5	600x600 THK*	20mm	-	-	THK R11 ≥36 PTV
6	300x600	9mm	BRU R10	NAT R11 ≥36 PTV	-
7	50x50 mos on 300x300	9mm	BRU R10	-	-
8	50x150 mos on 300x300	9mm	BRU R10	-	-
9	STP MOS on 300x600	9mm	BRU R10	-	-
10	300x1200 ST1	9mm	BRU R10	-	-
11	330x1200 ST2	9mm	BRU R10	-	-
12	330x1200 corner	9mm	BRU R10	-	-
13	70x600 SK	9mm	BRU R10	-	-

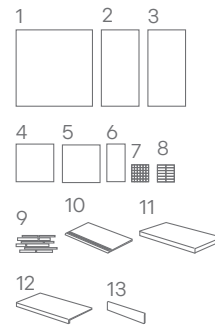

PDCB51072



LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:



Fistral



Above
PDCB51067

Right
PDCB51068



Above
PDCB51069



Fistral

Technical data sheet - ISO 10545 average values

3	Water absorption	< 0,1%
4	Flexural strength	45 N/mm ²
6	Deep abrasion resistance	≤ 150 mm ³
8	Linear thermal expansion	6 x 10 ⁻⁶
13	Chemical resistance	Class A
14	Stain resistance	Class 4-5
	Slip resistance DIN 51130	BRU R10 NAT R11 THK R11
	Pendulum test	NAT ≥36PTV THK ≥36PTV

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.