

Westfold

3 Colours | 1 Finish | 3 Size

Westfold captures the timeless charm of natural flagstones, combining subtle surface texturing, organic tonality, and soft tumbled edges. Designed for high-traffic indoor and outdoor environments, this range delivers a durable, character-rich surface with a natural finish.



LKAD52266




LKAD52267



LKAD52268



Westfold

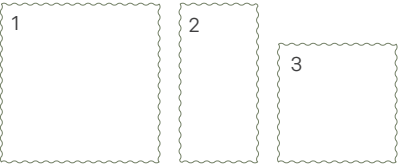

Size (mm)		Thickness	 SHOD PTV WET SLIDER 96	 BAREFOOT PTV WET SLIDER 55
1	600×600	9.5	Ultra Matt ≥40PTV	Ultra Matt ≥36PTV
2	300×600	8.7	Ultra Matt ≥40PTV	Ultra Matt ≥36PTV
3	450×450	8.5	Ultra Matt ≥40PTV	Ultra Matt ≥36PTV



ISO 10545 Results

3	Water absorption	$\leq 0,5\%$
4	Bending strength	$>1300 \text{ N}$
4	Modulus of rupture	$N \geq 35 \text{ N/mm}^2$
9	Resistance to thermal shock	Resistant
11	Crazing resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	Class A
14	Stain resistance	Class 5

Slip resistance

Pendulum test - Slider 96 (Shod) Wet Ultra Matt $\geq 40\text{PTV}$

Pendulum test - Slider 55 (Barefoot) Wet Ultra Matt $\geq 36\text{PTV}$

Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRVs and PTVs

LRV and PTV values may vary between batches; please contact us for guidance.

Document + web colours

Swatch colours may differ from final production, samples are recommended.

Sustainability



Shade variation

